


Product selection:

Part no.		Profile	Conduit size		rec. fitting thread size		Dimensions in mm (nom.)			Weight	Packing unit
black	grey	T/G	NW	metric	PG	metric	d1	d2	stat. R	kg/100 m	metre
POHT-10B	POHT-10S	T	10	12	9	M12 x 1.5	10.0	12.8	20	3.1	50
POHT-12B	POHT-12S	T	12	16	11	M16 x 1.5	12.3	15.6	25	4.2	50
POHG-17B	POHG-17S	G	17	20	16	M20 x 1.5	16.0	21.1	40	7.5	50
POHG-23B	POHG-23S	G	23	25	21	M25 x 1.5	22.1	28.4	50	12.0	50
POHG-29B	POHG-29S	G	29	32	29	M32 x 1.5	28.0	34.5	60	15.0	50
POHG-36B	POHG-36S	G	36	40	36	M40 x 1.5	36.4	42.4	75	19.0	30
POHG-48B	POHG-48S	G	48	50	48	M50 x 1.5	47.0	54.5	90	25.0	30
POHG-56B	POHG-56S	G	56	68	-	-	56.9	67.5	120	36.0	30
POHG-70B	POHG-70S	G	70	80	-	-	68.0	79.6	140	52.0	10
POHG-95B	POHG-95S	G	95	106	-	-	92.5	107.0	190	76.5	10

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

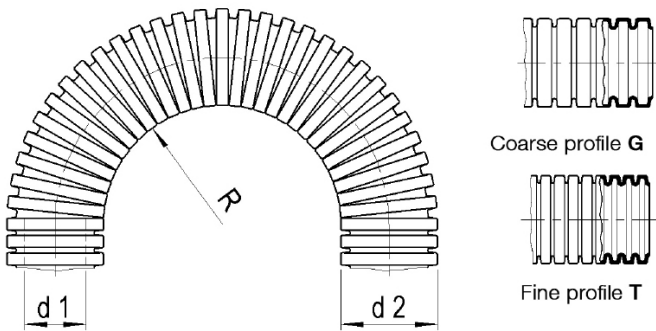

stat. R. = min. bending radius for static (fixed) installation

Mechanical Properties:	Value:	Test parameters:	Test method:
Impact strength	> 3 J		PMA DO 9.21-4330
	class 1, > 0.5 J	(-45°C)	IEC EN 61386
Compression strength	> 140 N	(50 mm)	PMA DO 9.21-4320
	> 280 N	(100 mm)	
	class 1		IEC EN 61386
Resistance to fatigue	> 70'000 cycles		PMA DO 9.21-4420
	class 4, flexible		IEC EN 61386
Pull-out resistance conduit - fitting series			
PMAFIX Pro	> 200 N		PMA DO 9.21-4610
	class 1		IEC EN 61386

Note: Testing at 23°C, 50% r.h., conduit nominal width 17, unless otherwise stated
IEC EN 61386: The values may only be considered as guidelines

Thermal properties:	Value:	Test parameters:	Test method:
Continuous operating temp.	-25 ... +95°C		PMA DO 9.21-4510
Short-term	+120°C	(168 h)	

Fire safety properties:	Value:	Test parameters:	Test method:
Fire performance	1a interior		BS 6853
Fire performance	V0		UL 94

ABB Switzerland Ltd,
PMA Cable Protection
Aathalstrasse 90
8610 Uster, Switzerland
Phone: +41 58 585 00 11
pma-info@ch.abb.com
www.pma.ch

Let's write the future.
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

